


# AZURE

lighting solutions




argus recessed downlight

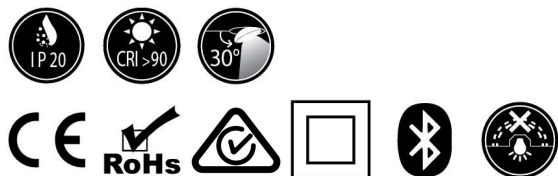

SYDNEY  
AUSTRALIA  
[WWW.AZURELIGHTINGSOLUTIONS.COM](http://WWW.AZURELIGHTINGSOLUTIONS.COM)

## Product Specifications



Power Consumption:	5W/8W
Total luminous flux:	500 lm/800 lm
Dimensions (DxH):	Ø75x79mm
Cutout (D):	Ø65mm
Beam Angle:	15°, 24°, 30°, 36°
Adjustability:	Adjustable

## General Specifications


Fixture Material:	Aluminium
Trim Finish:	Black/White
Mounting:	Recessed Mounted
LED Type:	Philips COB
Binning:	3 Step Macadam
Correlated Colour Temperature	2700K, 3000K, 3500K, 4000K, 5000K
Colour Rendering Index:	>90
R9 Value:	>50
Light Distribution:	Symmetric
Ambient Operating Temperature:	-25° to 50°
Driver Input Voltage:	220-240V AC 50-60Hz
Control Gear:	Remote Tridonic or equivalent driver
Control Options:	Fixed Output, DALI, Push Dim, 0-10V, Casambi
Protection Class:	Class II
Lumen Maintenance:	L80 B10 60,000 Hours
IP Rating:	IP20
Warranty:	5-Year Limited
Standards:	CE, ROHS

Lumen values are based on CRI90 at CCT 4000K

All product specifications and data are subject to change without notice

## Photometrics


15° BEAM ANGLE

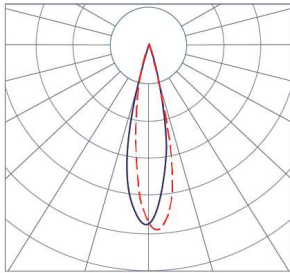

C0-C180  
C90-C270




36° BEAM ANGLE

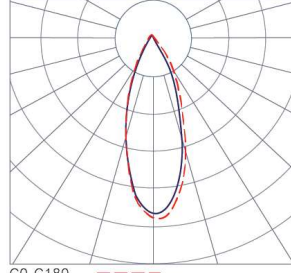


C0-C180  
C90-C270




24° BEAM ANGLE

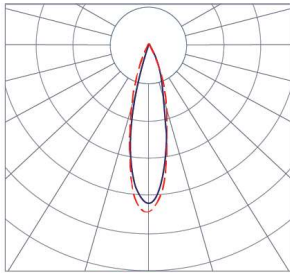

C0-C180  
C90-C270



30° BEAM ANGLE

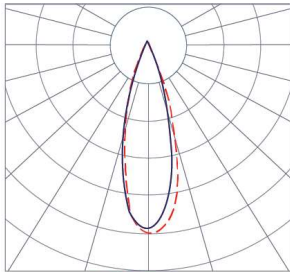

C0-C180  
C90-C270



# A Z U R E

l i g h t i n g  
s o l u t i o n s

## Specifications Code

---

ARGUS.075R . A . 5 . 20 . 930 . N . 15 . B

---

A=ADJUSTABLE

5=5W  
8=8W

20=IP20

927=2700K  
930=3000K  
935=3500K  
940=4000K

N=NON DIM  
D=DALI  
P=PUSH DIM  
0=0-10V  
C=CASAMBI  
X=NO DRIVER

15=15°  
24=24°  
30=30°  
36=36°

B=BLACK  
W=WHITE