


AZURE

lighting solutions




arion dark lighter recessed downlight

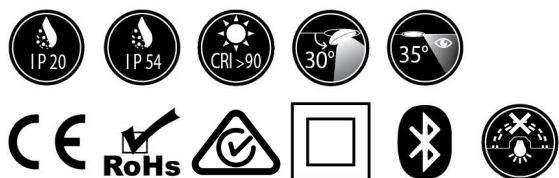

SYDNEY
AUSTRALIA
WWW.AZURELIGHTINGSOLUTIONS.COM

Product Specifications

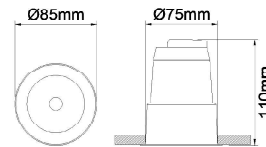

Power Consumption:	10W/12W
Total luminous flux:	900 lm/1000 lm
Dimensions (DxH):	Ø85x110mm
Cutout (D):	Ø75mm
Beam Angle:	15°, 24°, 36°
Adjustability:	Fixed/Adjustable

General Specifications


Fixture Material:	Aluminium
Trim Finish:	Black/White
Mounting:	Recessed Mounted
LED Type:	CITIZEN COB
Binning:	3 Step Macadam (2 Step Macadam Optional)
Correlated Colour Temperature	2700K, 3000K, 3500K, 4000K
Colour Rendering Index:	>90
R9 Value:	>50
Light Distribution:	Symmetric
Optical Cut-off Angle:	35°
Ambient Operating Temperature:	-25° to 50°
Driver Input Voltage:	220-240VAC 50-60Hz
Control Gear:	Remote Tridonic or equivalent driver
Control Options:	Fixed Output, DALI, Push Dim, 0-10V, Casambi
Protection Class:	Class II
Lumen Maintenance:	L80 B10 90,000 Hours
IP Rating:	IP20, IP54
Warranty:	5-Year Limited
Standards:	CE, ROHS

Lumen values are based on CRI90 at CCT 4000K

All product specifications and data are subject to change without notice


Photometrics

15° BEAM ANGLE

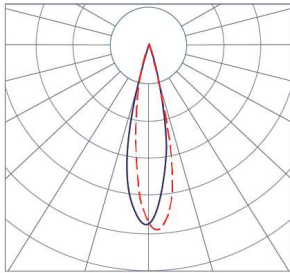


C0-C180
C90-C270

24° BEAM ANGLE

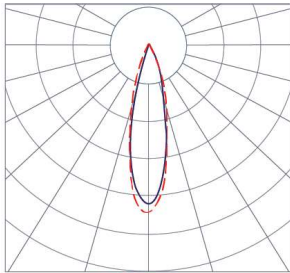

C0-C180
C90-C270

36° BEAM ANGLE

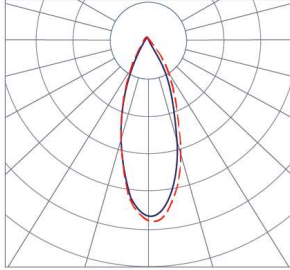

C0-C180
C90-C270

Accessories



Black chrome
reflector



Specular reflector



White reflector



Honeycomb Louvre

Standard inclusion - Black chrome reflector

Specifications Code

ARION.085R . F . 10 . 20 . 927 . N . 15 . B

F=FIXED
A=ADJUSTABLE

10=10W
12=12W

20=IP20
54=IP54

927=2700K
930=3000K
935=3500K
940=4000K
950=5000K

N=NON DIM
D=DALI
P=PUSH DIM
0=0-10V
C=CASAMBI
X=NO DRIVER

15=15°
24=24°
36=36°

B=BLACK
W=WHITE

Accessories

+ 1 . H

1=BLACK
2=SPECULAR
3=WHITE

H=HONEYCOMB