

# AZURE

lighting solutions




flexible high efficacy striplight  
**NEOSTRIP09H**



SYDNEY  
AUSTRALIA  
[WWW.AZURELIGHTINGSOLUTIONS.COM](http://WWW.AZURELIGHTINGSOLUTIONS.COM)

## Product Specifications

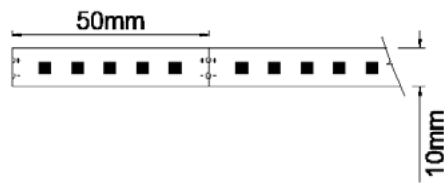

LED Type:	SMD 2835
LED Quantity:	160leds/M
Cutting Increments:	50mm
Power Consumption:	9.6 Watts Per Meter
Binning::	3 Step Macadam
CCT:	2700K, 3000K, 4000K, 6500K
Beam Angle:	110°
Colour Rendering Index:	>90
R9 Value:	>50
Total Luminous Flux:	1450lm per meter
Ambient Operating Temperature:	-20° to 45°
Input Voltage:	24VDC
DC Voltage Range:	23-25V
Insulation Test Voltage:	0.5VK
Protection Class:	Class III (SELV)
Control Gear:	Meanwell driver or equivalent
Control Options:	Fixed Output, DALI, 0-10V,Casambi
Lumen Maintenance:	L80 B10 50,000 Hours
Material:	Flexible PCB with self adhesive 3M tape
Light Distribution:	Symmetric
Dimensions:	L:5000mm x W:10mm
Warranty:	5-Year Limited
Standards:	CE,ROHS
IP Rating:	IP00, P65, IP68


Lumen values are based on IP00 and CCT 4000K

All product specifications and data are subject to change without notice

## Photometrics

---

110° BEAM ANGLE

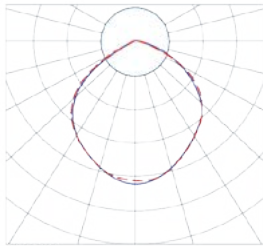

## Specifications Code

---

NEOSTRIP.09H . 927 . N . 20


**927=2700K**  
930=3000K  
940=4000K  
965=6500K

**N=NON DIM**  
D=DALI  
P=PUSH DIM  
O=0-10V  
C=CASAMBI  
X=NO DRIVER

**20=IP00**  
65=IP65  
68=IP68


## Surface Mounted (Type S602 available with optional suspension kit)

Material:	Anodized Aluminum
Length:	1-3 meter
Diffuser:	Opal Diffuser

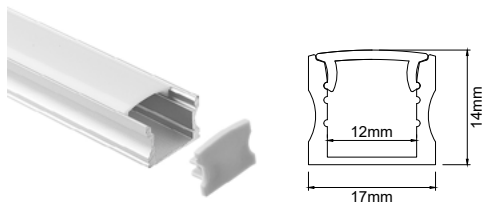

### S601


Internal Width:	12mm
Dimension:	17 x 14mm

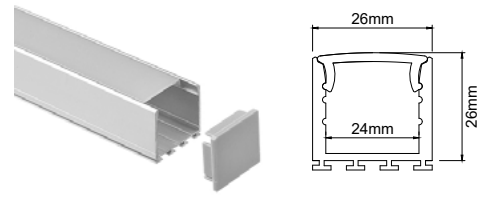

### S602


Internal Width:	24mm
Dimension:	26 x 26mm

## Recessed Mounted (Type R502 available with optional suspension kit)

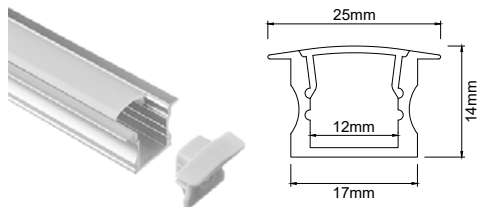

### R501


Internal Width:	12mm
Dimension:	14 x 25mm

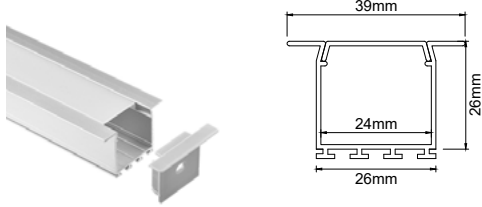

### R502

Internal Width:	20mm
Dimension:	23 x 26.2mm

## Corner Mounted

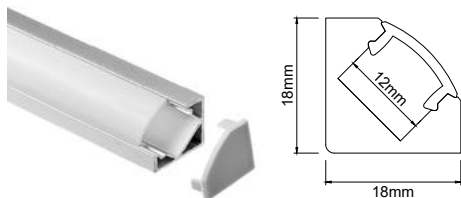

### C701

Internal Width:	12mm
Dimension:	18 x 18mm