


AZURE

lighting solutions




ZOHAR TRACK LIGHT

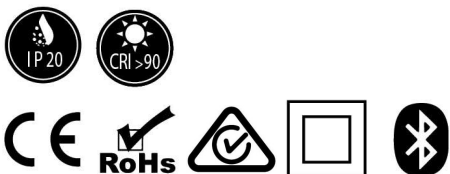

SYDNEY
AUSTRALIA
AZURELIGHTINGSOLUTIONS.COM

Product Specifications



Power Consumption:	20W	30W
Total luminous flux:	2400 lumen	3600 lumen
Dimensions (DxH):	Ø95x95mm	Ø95x95mm
Beam Angle:	20°, 30°, 55°	20°, 30°, 55°

General Specifications

Fixture Material:	Aluminium
Trim Finish:	Black, White, Custom
Mounting:	Track
LED Type:	Citizen COB
Binning:	3 Step MacAdam
Correlated Colour Temperature	2700K, 3000K, 3500K, 4000K, 5000K, 6000K, 6500K
Colour Rendering Index:	>90
R9 Value:	>50
Light Distribution:	Symmetric
Optical Cut-off Angle:	35°
Ambient Operating Temperature:	-25° to 50°
Driver Input Voltage:	220-240VAC 50-60Hz
Control Gear:	TCI
Control Options:	Fixed Output, DALI, Push Dim, 0-10V, Casambi
Protection Class:	Class II
Lumen Maintenance:	L80 B10 60,000 Hours
IP Rating:	IP20
Warranty:	7 Years

Lumen values are based on CRI90 at CCT 4000K


All product specifications and data are subject to change without notice

A Z U R E

l i g h t i n g
s o l u t i o n s


Photometrics

20° BEAM ANGLE

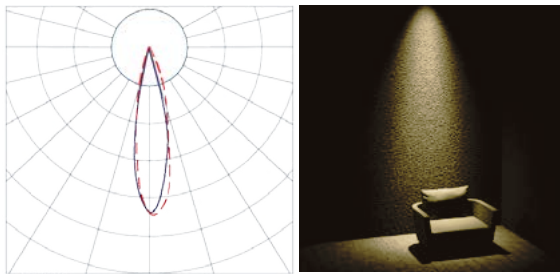


C0-C180
C90-C270

55° BEAM ANGLE

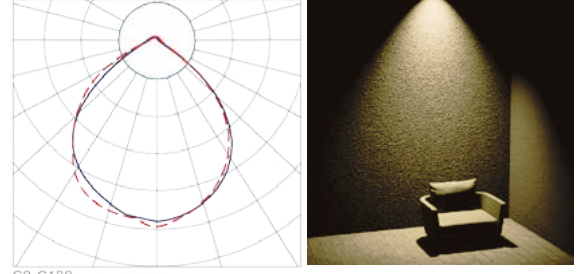

C0-C180
C90-C270

30° BEAM ANGLE

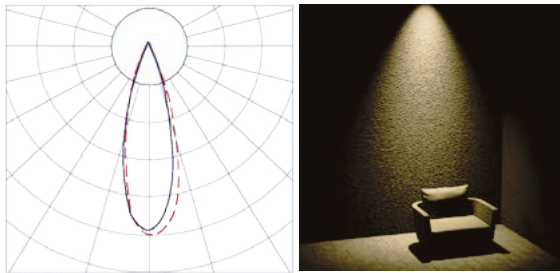

C0-C180
C90-C270

Specifications Code

ZOHAR.095 . T . 20 . 20 . 927. N . 20 . B

T=TRACK

20=20W
30=30W

20=IP20

927=2700K
930=3000K
935=3500K
940=4000K

N=NON DIM
D=DALI
P=PUSH DIM
0=0-10V
C=CASAMBI
X=NO DRIVER

20=20°
30=30°
55=55°

B=BLACK
W=WHITE

Track Accessories



Black Track Rail



White Track Rail



L Connector



Flexible Connector



I Connector



X Connector



T Connector



Suspension Kit