


# AZURE


lighting solutions



## **Ecolume** Recessed Downlight

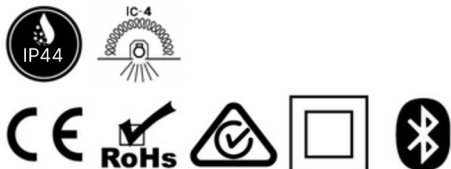

AZURELIGHTINGSOLUTIONS.COM  
+61 9188 7712



### Product Specifications

Product Name:	Eolume.95	Eolume.115	Eolume.140	Eolume.188
Power Consumption:	7W	10W	15W	20W
Total luminous flux:	630 lumen	900 lumen	1300 lumen	1700 lumen
Dimensions (DxH):	Ø95x55mm	Ø115x58mm	Ø140x65mm	Ø188x68mm
Cutout (D):	Ø70mm	Ø90mm	Ø110mm	Ø150mm
Beam Angle:	120°	120°	120°	120°
Adjustability:	Fixed	Fixed	Fixed	Fixed

### General Specifications

Fixture Material:	Aluminium
Trim Finish:	White, Custom
Mounting:	Recessed
LED Type:	SMD
Binning:	3 Step MacAdam
Correlated Colour Temperature	3000K,4000K,5000K
Colour Rendering Index:	>80
Light Distribution:	Symmetric
Ambient Operating Temperature:	-25° to 50°
Driver Input Voltage:	220-240VAC 50-60Hz
Control Gear:	Integrated
Control Options:	Fixed Output, Phase Dim (5%-100%)
Protection Class:	Class II
Lumen Maintenance:	L80 B10 50,000 Hours
IP Rating:	IP44
Warranty:	5 Years

Lumen values are based on CRI80 at CCT 4000K

All product specifications and data are subject to change without notice

## Specification Code

Ecolume.95 . F . 7 . 44 . 830. N . 100 . W

F=Fixed      7=7W      44=IP44      830=3000K  
840=4000K  
850=5000K      N=NON DIM  
P=PHASE DIM      100=100°      W=WHITE

Ecolume.115 . F . 10 . 44 . 830. N . 100 . W

F=Fixed      10=10W      44=IP44      830=3000K  
840=4000K  
850=5000K      N=NON DIM  
P=PHASE DIM      100=100°      W=WHITE

Ecolume.140 . F . 15 . 44 . 830. N . 100 . W

F=Fixed      15=15W      44=IP44      830=3000K  
840=4000K  
850=5000K      N=NON DIM  
P=PHASE DIM      100=100°      W=WHITE

Ecolume.188 . F . 15 . 44 . 830. N . 100 . W

F=Fixed      15=15W      44=IP44      830=3000K  
840=4000K  
850=5000K      N=NON DIM  
P=PHASE DIM      100=100°      W=WHITE