

AZURE


lighting solutions



Evacutre ECO LED Exit Light




AS/NZS
2293.3




AZURELIGHTINGSOLUTIONS.COM
+61 9188 7712

Product Specifications

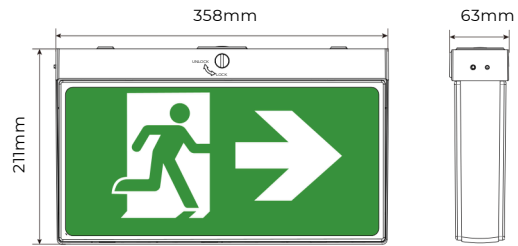

Fixture Material:	Polycarbonate
Diffuser:	Polystyrene
Decal Material:	PVC
Mounting:	Surface (Ceiling and Wall), Recessed, Suspended
LED Type:	SMD
Correlated Colour Temperature:	6000K
Colour Rendering Index:	>80
Battery:	LiFePO4 3.2V 600mAh
M Power:	3W
Emergency Power:	1W
Charge Duration:	≥16 Hours
Discharge Duration:	≥2 Hours
Ambient Operating Temperature:	-0° to 45°
Input Voltage:	220-240VAC 50-60Hz
Viewing Distance:	24 meters
Test Options:	Automatic Testing, Manual Testing, DALI Testing
Protection Class:	Class II
Wiring:	PA12 - Terminal Block (0.75-6mm)
Emergency Classification:	C0:D2.5, C90: D2.0
Lumen Maintenance:	L80 B10 50,000 Hours
IP Rating:	IP20
Dimensions (LxWxH):	360x63x211mm
Warranty:	5 Years

Mounting options

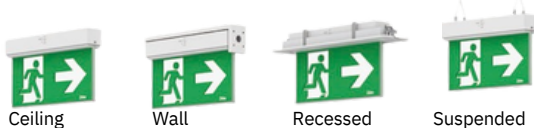

All product specifications and data are subject to change without notice