


AZURE


lighting solutions



Orion Highbay Light

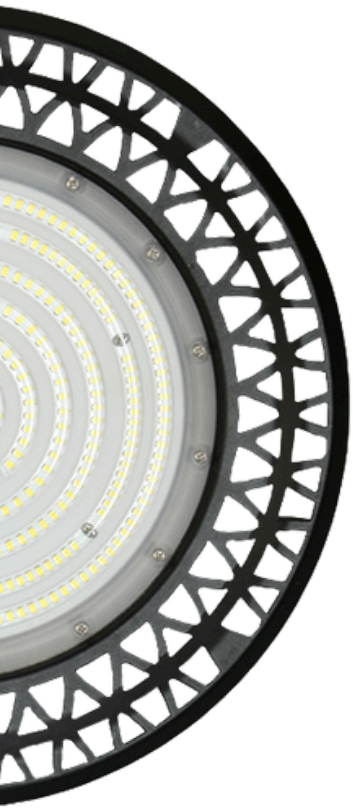

SYDNEY
AUSTRALIA
WWW.AZURELIGHTINGSOLUTIONS.COM



Product Name:	Orion.280	Orion.340	Orion.380
Power Consumption:	80W-100W	120W-150W	200W-240W
Total luminous flux:	14400 to 18000lm	21600 to 27000lm	36000 to 43200lm
Beam Angles:	60°, 90°,120°	60°, 90°,120°	60°, 90°,120°
Dimension (DxH):	Ø280x150mm	Ø340x165mm	Ø380x180mm

General Specifications

Fixture Material:	Die Cast Aluminium
Finish:	Black, Custom
Mounting:	Surface, Suspended
LED Type:	Lumileds
Binning:	3 Step MacAdam
Correlated Colour Temperature	3000K, 4000K, 5000K, 6000K
Colour Rendering Index:	>80
Ambient Operating Temperature:	-25° to 50°
Driver:	Philips, Meanwell
Driver Input Voltage:	220-240VAC 50-60Hz
Control Options:	Non Dim, Phase Dim, 0-10V, DALI, Zigbee
THD:	<10%
Protection Class:	Class I
Lumen Maintenance:	L80 B10 72,000 Hours
IP Rating:	IP65
IK Rating:	IK10
Warranty:	10 Years

Accessories

Anti Glare PC Cover



Lumen values are based on CRI80 at CCT 4000K

All product specifications and data are subject to change without notice

Specification Code

Orion.280	. 80 .	830.	N.	60.	B
	80=80W 100=100W	830=3000K 840=4000K 850=5000K 860=6000K	N=NON DIM D=DALI 0=0-10V C=CASAMBI MS= SENSOR	60= 60° 90= 90° 120= 120°	B=Black S=Silver

Orion.340	. 120 .	830.	N.	60.	B
	120=120W 150=150W	830=3000K 840=4000K 850=5000K 860=6000K	N=NON DIM D=DALI 0=0-10V C=CASAMBI MS= SENSOR	60= 60° 90= 90° 120= 120°	B=Black S=Silver

Orion.380	. 200 .	830.	N.	60.	B
	200=200W 240=240W	830=3000K 840=4000K 850=5000K 860=6000K	N=NON DIM D=DALI 0=0-10V C=CASAMBI	60= 60° 90= 90° 120= 120°	B=Black S=Silver

Accessories

+	. C .	A .	MS
	C= 1m Suspension 0=None	A=Anti Glare Shade 0=None	MS= SENSOR 0=None

Lumen values are based on CRI80 at CCT 4000K

All product specifications and data are subject to change without notice