

AZURE

lighting solutions



Micolux LED Emergency Projector




AS/NZS
2293.3



AZURELIGHTINGSOLUTIONS.COM
+61 9188 7712

Product Specifications

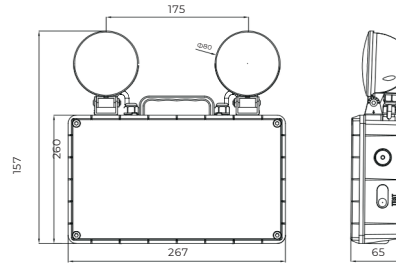

Fixture Material:	Polycarbonate
Finish:	Black, White
Mounting:	Surface
LED Type:	SMD
Correlated Colour Temperature:	5000K
Colour Rendering Index:	>80
Battery:	LiFePO4 6.4V 6000mAh
Mains Power:	7W,9W,12W,20W
Emergency Power:	5.5W,7W,9W,14W
Total Lumen Output:	750lm,1000lm,1200lm,2000lm
Charge Duration:	≥16 Hours
Discharge Duration:	≥2 Hours
Ambient Operating Temperature:	-0° to 45°
Input Voltage:	220-240VAC 50-60Hz
Test Options:	Automatic Testing, Manual Testing, DALI Testing
Protection Class:	Class II
Wiring:	PA12 - Terminal Block (1-16mm)
Emergency Classification:	C0:D80, C90: D80
Lumen Maintenance:	L80 B10 50,000 Hours
IP Rating:	IP65
Dimensions (LxWxH):	See Drawing
Warranty:	5 Years

All product specifications and data are subject to change without notice